

NOTES

- DESIGN PRESSURE 4.5MPA
- THE MINIMUM BURST PRESSURE OF THE PRODUCT IS THREE TIMES THE DESIGN PRESSURE
- DIAGONAL DIFFERENCE MAX 4mm
- TOLERANCE IF NOT SPECIFIED SHALL COMPLY WITH STANDARD ISO 2768-1 CLASS C(GB/T 1804 CLASS C)
- SEAL 0.01~0.05MPA NITROGEN GAS IN THE PRODUCT
- OTHER STANDARDS JB/T11967 EN378-2
- THE INLET AND OUTLET PIPES ARE COPPER PIPES


PRODUCT PARAMETERS

TUBE NUMBER	43
TUBE TYPE	16*1.3-16
TUBE MATERIAL	LLA9153(3F03)+Zn- H112
(LONG USING LIFE ALLOY)	
MANIFOLD TYPE	φ20
FIN TYPE	LOUVERED 16*0.08 FPI 23
FIN MATERIAL	AA4343/3003/4343
PASS	10/14/12/7



UNMARKED TOLERANCE	DESCRIPTION: Microchannel heat exchanger	
	MODEL: RC-1200-S	REV. A
VIEW	CODE: 021U0082R	CREAT: AUDIT:
APPROVED BY CUSTOMER SIGNATURE:	PROCESS: APPROVE:	

X ±1.5
X.X ±1
X.XX ±0.5
∠ ±1°

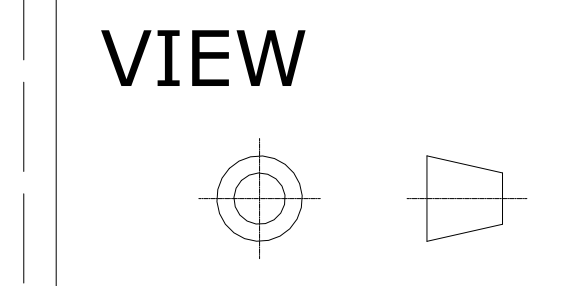

APPROVED BY
CUSTOMER SIGNATURE:

PROCESS:
APPROVE: