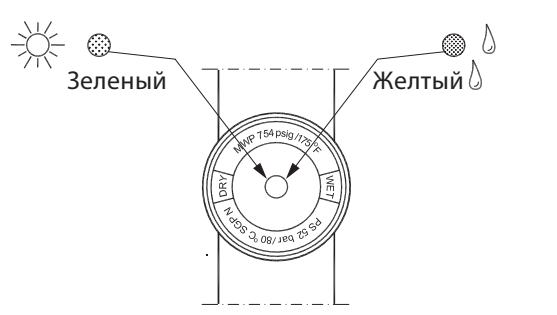
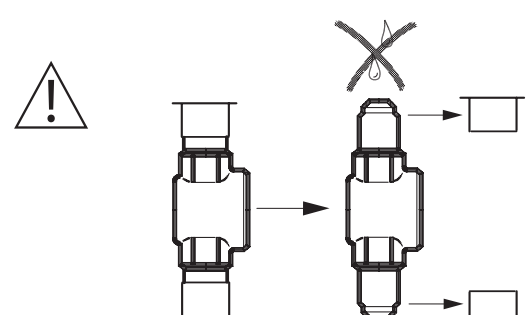



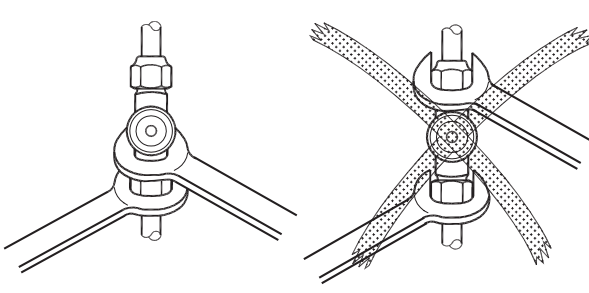
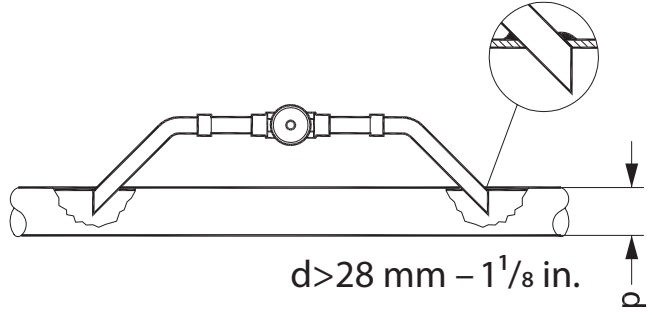


# Руководство по монтажу

## Смотровое стекло

Серия SGP

<b>Хладагенты:</b> R134a, R22/R407C, R404A/R507, R407A, R407F, R410A, R448A, R449A, R452A, R513A, R1234ze				
<b>Температура рабочей среды:</b> -40 – 80 °C				
<b>Максимальное рабочее давление:</b> 45 бар				
				
				
Тип	W		W	
	мм	дюймы	мм	дюймы
SGP 6	14	9/16	19	3/4
SGP 10	14	9/16	22	7/8
SGP 12	19	3/4	24	—
SGP 16	22	7/8	26	—
SGP 19	26	—	—	—
				
				
<b>Момент затягивания</b>				
Тип	Н*м			
SGP 6	15-18			
SGP 10	20-25			
SGP 12	30-35			
SGP 16	45-55			
SGP 19	65-75			