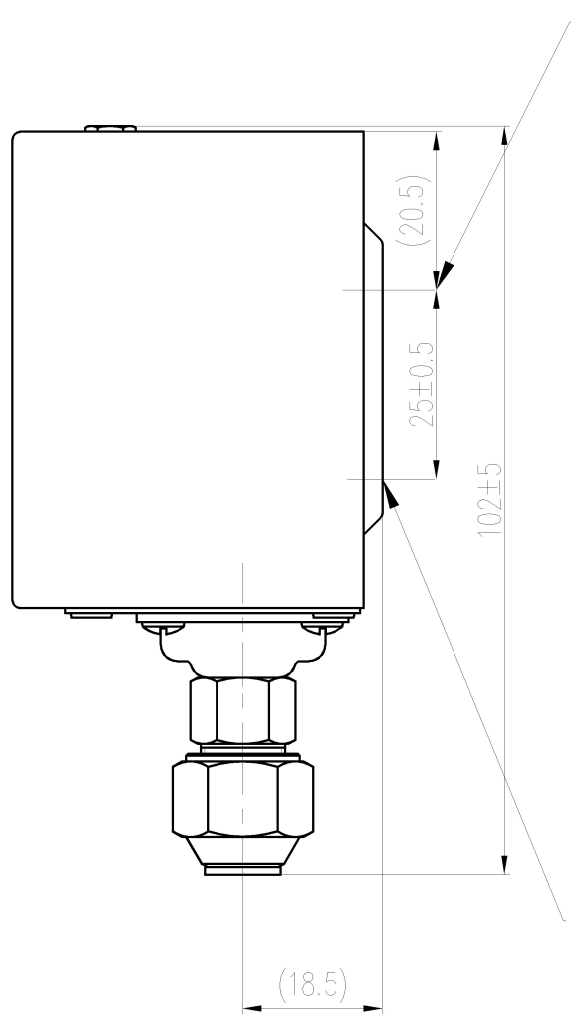

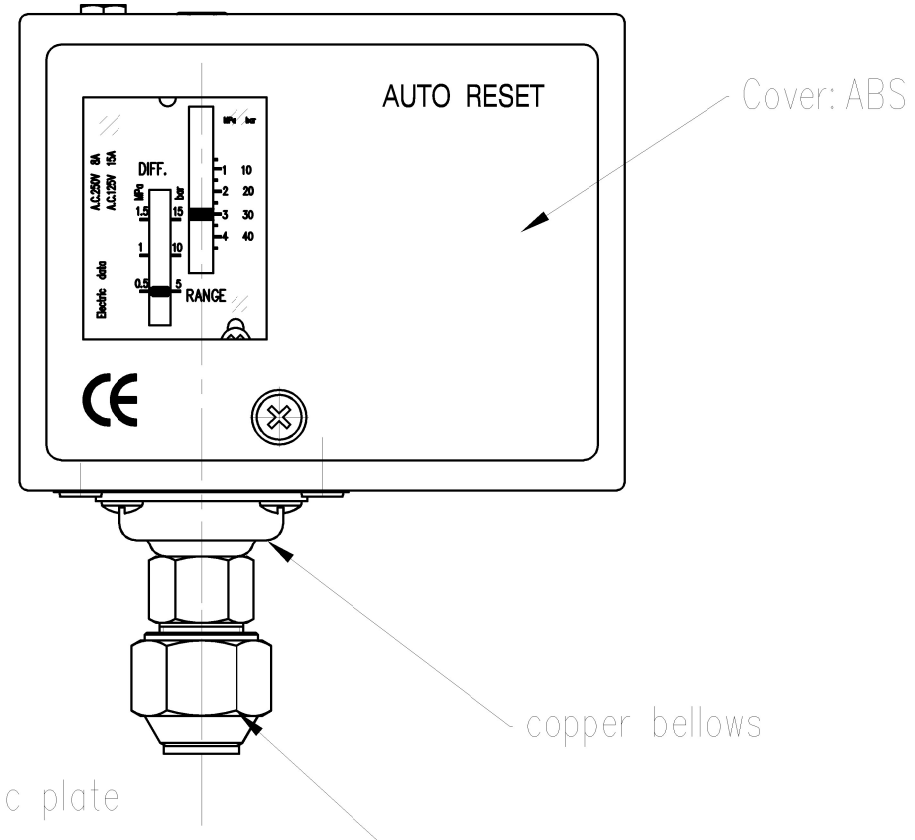

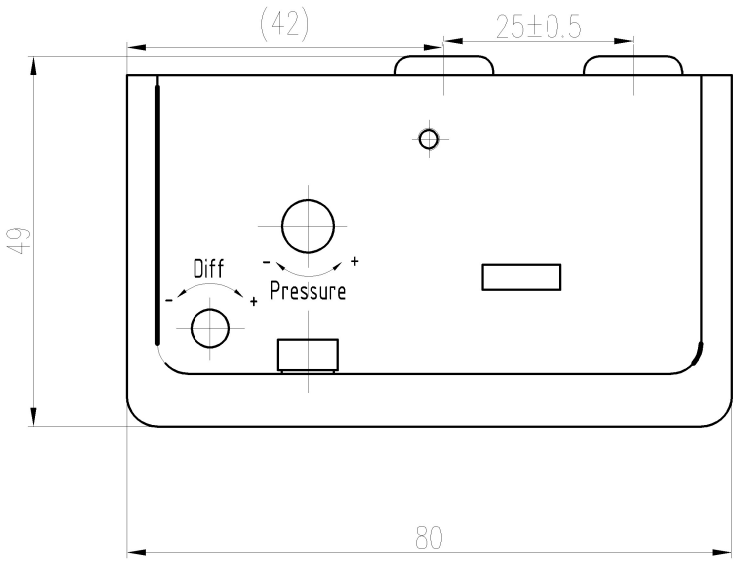

Technical requirement:

1. Remarks : High pressure switch
2. Switch action: SPDT
3. Range: 10~45bar
4. Differential: 5~15bar
5. Max working pressure: 48bar
6. Pressure connection: 1/4Flare
7. Factory set range to 30bar,differential to 5bar °

SPDT	CONTACT LOAD	
	125V AC	250V AC
FLA	16A	8A
LRA	96A	48A
RESISTIVE LOAD	16A	8A
PILOT DUTY	3A	3A

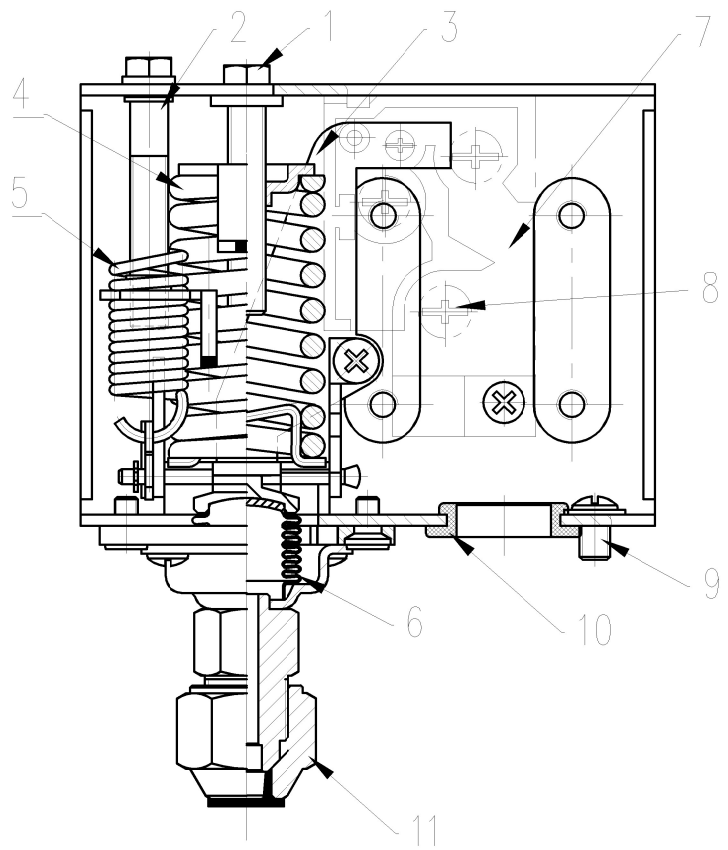

1. Pressure setting spindle
2. Differential setting spindle
3. Main arm
4. Main spring
5. Differential spring
6. Bellows
7. Contact system
8. Terminal
9. Ground terminal
10. Cable entry
11. Brass nuts

					Pressure switch	060-519066R
Design						1 : 1
		No.			1	1
		DATE	2014/7/03			РИДАН